

Supported by



High Energy Physics



Multichannel Spectroscopy



Industrial

KEY FEATURES

- ◆ 128 channels, 14-bit @125 MS/s Digitizer
- ◆ Based on powerful Xilinx Zynq-7000 SoC with **open FPGA**
- ◆ Ideally suited to readout **large arrays of detectors** (³He tubes, PMTs, segmented HPGe, ...) using a **customizable platform**. By taking advantage of the powerful SoC architecture the user can quickly and easily design **custom logic and pulse processing algorithms** on the open FPGA, as well as develop middleware/software which perfectly matches of the application of interest. No expertise in VHDL/Verilog is required for the user to utilize this powerful tool.
- ◆ 2U, 19" Rackmount unit
- ◆ **Differential** analog inputs on RJ45 connectors
- ◆ 2 V_{pp} input dynamic
- ◆ Board-to-board **synchronization** with a single CAT5e cable.
- ◆ Configurable digital I/Os to interface with external systems
- ◆ Maximum **flexibility**: USB3.0, Ethernet, and Optical Link connectivity , to support remote management as well as extreme fast data flow
- ◆ 2.4" touch screen display for quick configuration and status control
- ◆ Fully supported by **SCI-Compiler** for easy FPGA programming

DESCRIPTION

The R5560 is a rack-mountable, 128 Channel, 14-bit 125MS/s Waveform Digitizer which features an **Open FPGA** format which offers the user vast programmable data processing capabilities

The R5560 Open FPGA Digitizer is ideally suited to readout large **arrays of detectors** (³He tubes, PMTs, segmented HPGe, ...) using a **customizable platform**. By taking advantage of the powerful SoC architecture the user can quickly and easily design **custom logic and pulse processing algorithms** on the open FPGA, as well as develop middleware/software which perfectly matches of the application of interest. No expertise in VHDL/Verilog is required for the user to utilize this powerful tool.

The board can simultaneously manage numerous a large **digital** (LVDS, NIM, TTL) and **analog** signals, thus supporting the implementation of a wide range of functionalities required by physics experiments: Signal Digitization, Complex Trigger Logic, Pulse Height Analysis with MCA capabilities, Time Tagging, Pulse Shape Discrimination, etc. R5560 features differential analog inputs on RJ45 connectors.

The R5560 is an ideal solution for **large experiments**, which often require fast digitization of analog signals and the use of several digital lines to interface with external systems. The board supports **multi-board synchronization** via a single CAT5e cable, and can be scaled up to thousands of channels. Additionally, the **rack-mount** form factor makes for a very clean and elegant multi-board environmental setup where effective space management is critical. The R5560 also **optimizes cabling cost** thanks to the differential analog inputs on RJ45 connectors (a single CAT5e cable to carry 4 analog inputs).

SCI-Compiler software, the CAEN block-diagram-based firmware generator and compiler, provides a simple yet powerful tool for programming the FPGA to develop intensive real-time data processing.

Free and open-source demo **readout software** also provided. This open-source demo software is designed to manage the standard pulse height analysis firmware implementing energy measurements using a trapezoidal filter.

Powerful ...

The R5560 is based on the Xilinx Zynq-7000, a powerful System-on-Chip that uses programmable logic to develop highly effective real-time signal processing capability. The R5560 also houses a Dual Core 1GHz ARM processor for Ethernet communication and data post-processing.


The board core is organized into 4 sections, each supporting both **DAQ capabilities** and **Digital Interface**. Each section hosts 32 configurable digital LVDS I/Os on VHDCI connector and may be read out via 32 analog channels.

... and Flexible

The R5560/R5560SE has been designed to provide **maximum flexibility**, not only for detector arrays comprised of 1000s of channels, but also for smaller independent detector arrays as well. The 4 sections of the board core may be utilized as 4 completely independent 32-channel digitizers, providing the user with the option to read out data from 4 completely independent detector arrays.

The wide range of hosted communication protocols (Ethernet, Optical Link, USB3.0 shared connectivity for low rate data transfer) and the scalable architecture have been designed to be flexible enough to support the **development of new multi-board detector readout systems** as well as **integrate into and enhance readout capabilities within existing facilities**.

Critical to the R5560 design is an **open-FPGA** architecture. Thanks to **Sci-Compiler** software, users can combine several processing blocks in a block diagram, supporting the quick and simple development of firmware algorithms critical to data processing. In few clicks, and without the knowledge of any FPGA programming language, it is possible to implement Pulse Height Analysis (PHA), highly accurate event timing and timestamping (TDC), mathematical operations (including data fitting), Pulse shape discrimination (PSD), and much more.

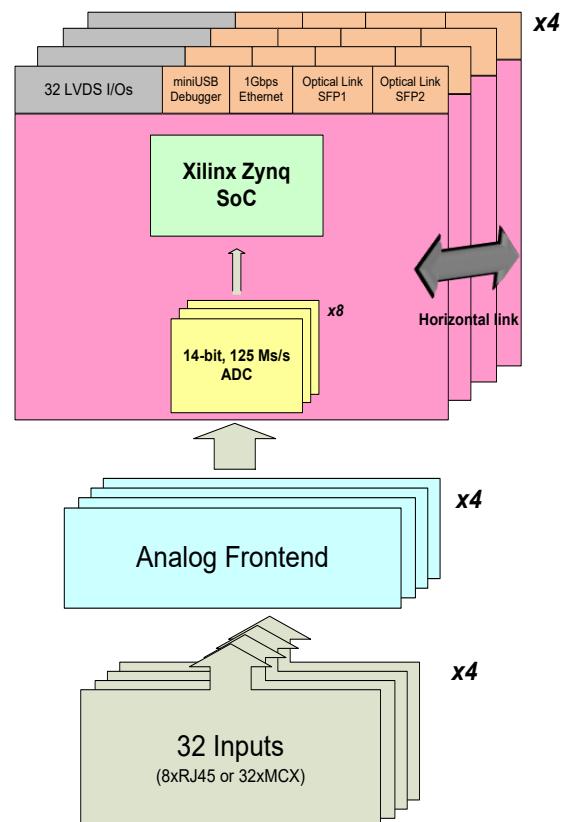

R5560 is suitable for building an integrated multi-channel DAQ system for Position-Sensitive Detectors, Gaseous Detectors, PMTs, Germanium detectors, RPCs and other detectors.

A use case: the SANS technique

Small angle neutron scattering (SANS) is a technique which is applied across a wide spectrum of scientific disciplines such as chemistry, physics, biology, materials science, engineering and geoscience. The aim of SANS is probing materials on the molecular levels to extract critical information such as the size, shape and spatial correlation of nanoscale structures.

The CAEN R5560 meets all requirements for the readout of **position-sensitive tubes** used for **neutron detection** in SANS instruments. The board can address the demand for **thousands of readout channels** and perform energy and time-of-flight measurements.



Ordering Option

Ordering code
WR5560AXAAAA
WR5560BXAAAA


Description
R5560A - 128 Ch. 14 bit 125 MS/s Digitizer -7030 (SciCompiler SW555 included)
R5560B - 128 Ch. 14 bit 125 MS/s Digitizer -7035 (SciCompiler SW555 included)



Register your device

Register your device to your **MyCAEN+** account and get access to our customer services, such as notification for new firmware or software upgrade, tracking service procedures or open a ticket for assistance. **MyCAEN+** accounts have a dedicated support service for their registered products. A set of basic information can be shared with the operator, speeding up the troubleshooting process and improving the efficiency of the support interactions.

MyCAEN+ dashboard is designed to offer you a direct access to all our after sales services. Registration is totally free, to create an account go to <https://www.caen.it/become-mycaenplus-user> and fill the registration form with your data.

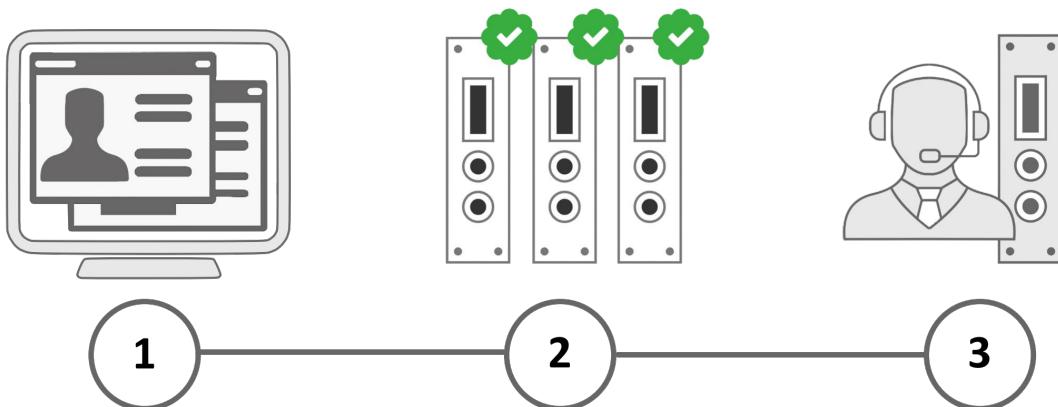

create a MyCAEN+ account

register your devices

get support and more!



<https://www.caen.it/become-mycaenplus-user/>



CAEN S.p.A.
Via Vetraia 11
55049 - Viareggio
Italy
Phone +39 0584 388 398
Fax +39 0584 388 959
info@caen.it
www.caen.it



CAEN GmbH

Brunnenweg 9
64331 Weiterstadt
Germany
Tel. +49 (0)212 254 4077
Mobile +49 (0)151 16 548 484
info@caen-de.com
www.caen-de.com

CAEN Technologies, Inc.

1 Edgewater Street - Suite 101
Staten Island, NY 10305
USA
Phone: +1 (718) 981-0401
Fax: +1 (718) 556-9185
info@caentechnologies.com
www.caentechnologies.com

CAENspa INDIA Private Limited

B205, BLDG42, B Wing,
Azad Nagar Sangam CHS,
Mhada Layout, Azad Nagar, Andheri (W)
Mumbai, Mumbai City,
Maharashtra, India, 400053
info@caen-india.in
www.caen-india.in

